

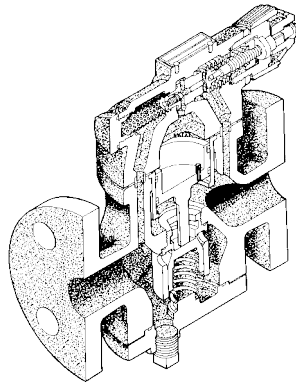
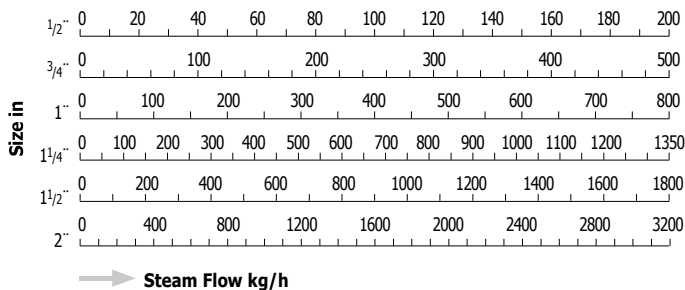


RE10N

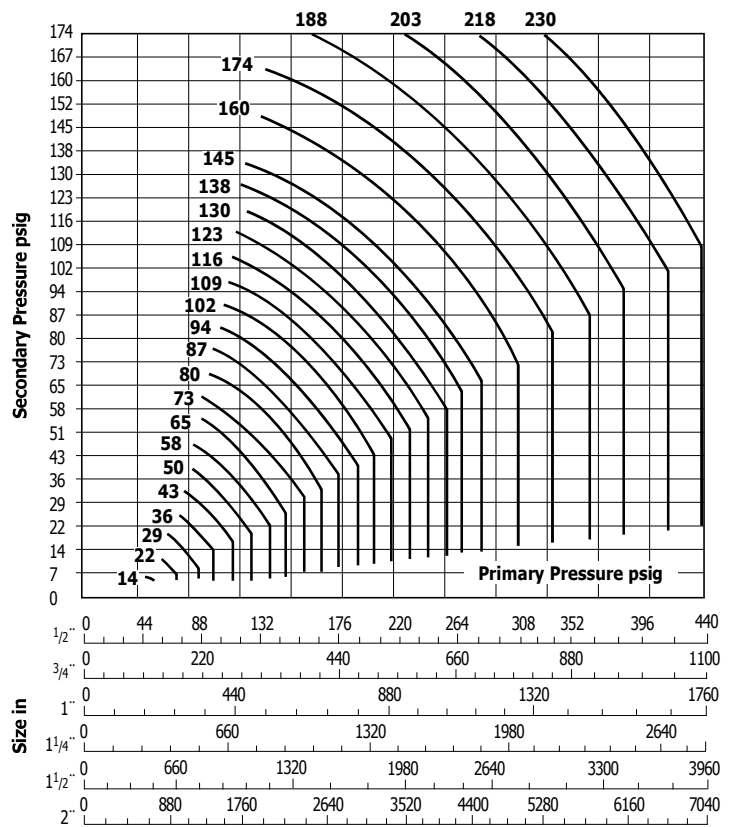


Body Material: Ductile Cast Iron FCD450

Capacity Charts RE10N

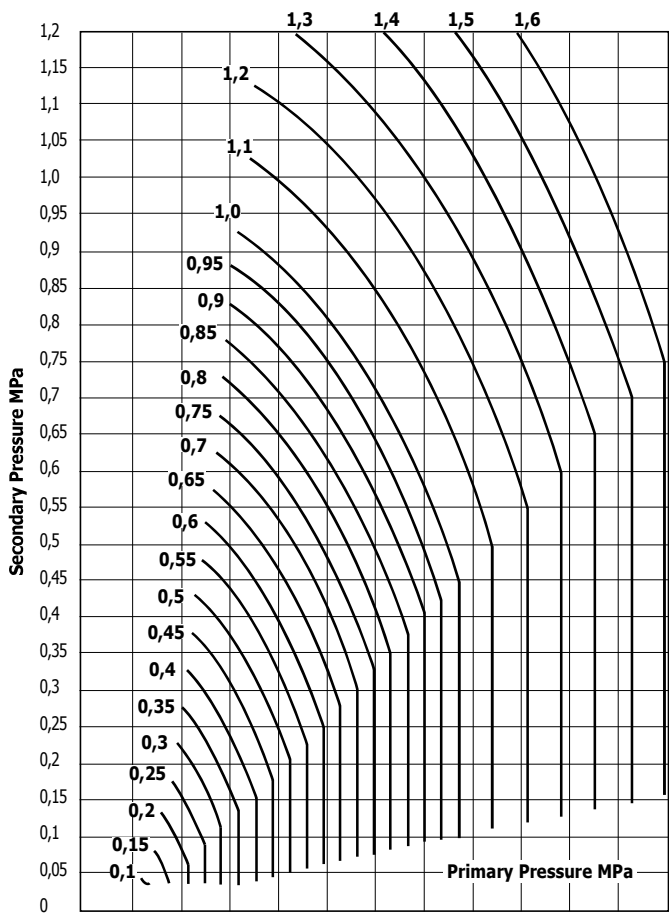

→ Steam Flow lb/h

Dimensions RE10N

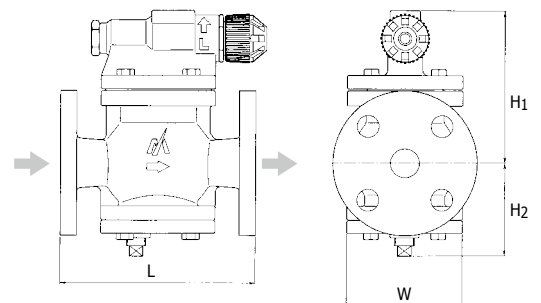

Model	Connection	Size (in)	Operating Pressure (Primary)		Secondary Pressure		Max. Red. Pressure Ratio	Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Weight		Values	
			MPa	psig	MPa	psig		°C	°F	L	H ₁	H ₂	W	L	H ₁	H ₂	W	kg	lb	Cv	Kvs
RE10N	Flanged JIS, ASME, DIN	1/2"	0,1 - 1,6	14.5 - 230	0,03 - 1,2	4.4 - 174	20 : 1	220	428	160	133	80	100	6.3	5.2	3.1	3.9	7,1	15.7	1,0	0,9
		170											6.7				8,5	18.7	2,5	2,2	
		200								154	103	130	7.9	6.1	4.1	5.1	14,2	31.3	6,5	5,6	
		220											8.7				14,3	31.5	9,0	7,7	
																	15,6	34.4	16,0	13,8	