

G2, G4, G6, G8 GH2, GH4, GH6, GH8


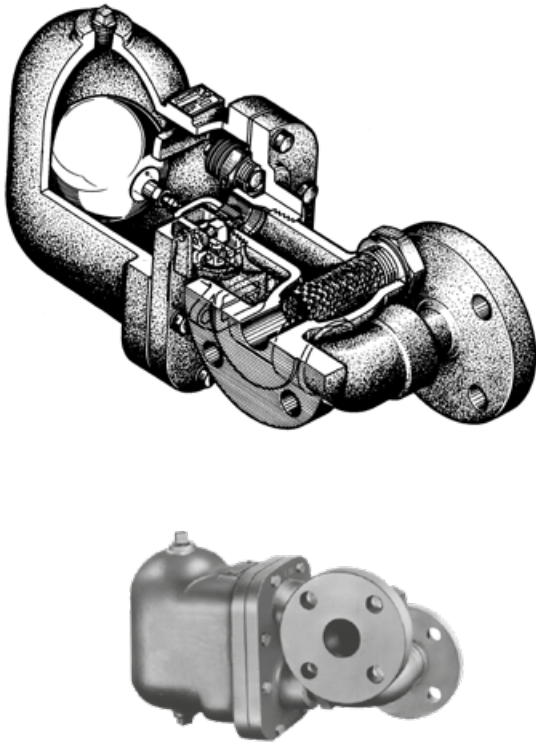




Diagrama de Capacidad

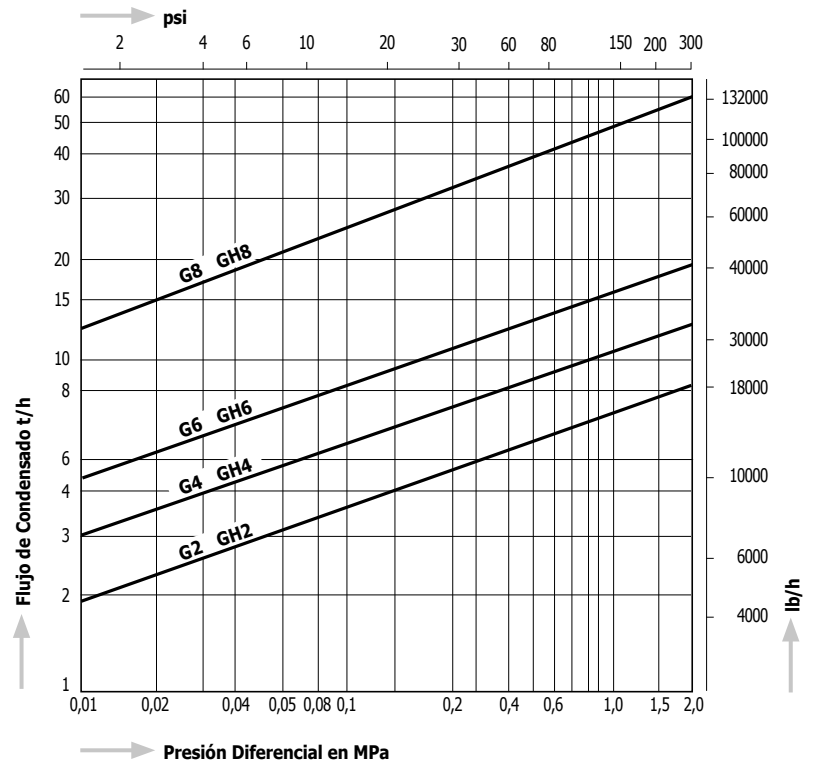

Dimensiones

G2 / GH2

G4, G6, G8 / GH4, GH6, GH8

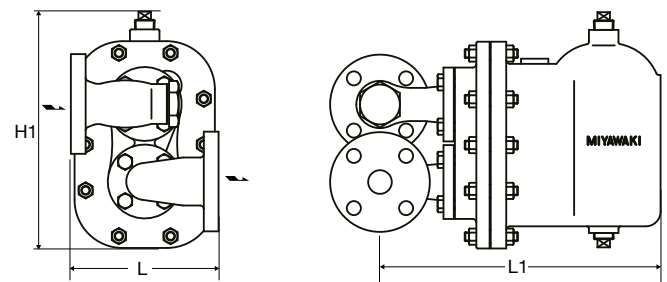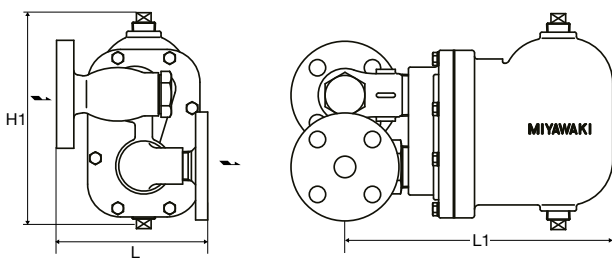

Modelo	Tipo de Conexión	Tamaño	Máx. presión de operación		Máx. temperatura de operación		Dimensiones (mm)			Dimensiones (in)			Material del Cuerpo		Peso	
			MPa	psig	°C	°F	L	L1	H	L	L1	H	kg	lb		
G2	Bridada JIS, ASME, DIN	1"	1,6	230	220	428	175	310	250	6.9	12.2	9.8	Hierro Fundido de alto grado FC250	21	46.2	
		180					7.1									
		190					7.5									
		200					7.9									
G4	1 1/4" - 2"	200	380	320	7.9	14.9	12.6	38	83.6							
G6		270	410	350	10.6	16.1	13.8	62	136.4							
G8		350	570	480	13.8	22.4	19.9	147	323.4							
GH2	Bridada JIS, ASME, DIN	1" - 1 1/2"	2,0	290	400	752	200	310	235	7.9	12.2	9.1	Acero Fundido SCPH2	24	52.8	
		210					8.3									
GH4	1 1/4" - 2"	200	380	320	7.9	14.9	12.6	43	94.6							
GH6		270	415	345	10.6	16.3	13.6	68	149.6							
GH8		350	590	470	13.8	23.2	18.5	162	356.4							