

# G2, G4, G6, G8 GH2, GH4, GH6, GH8


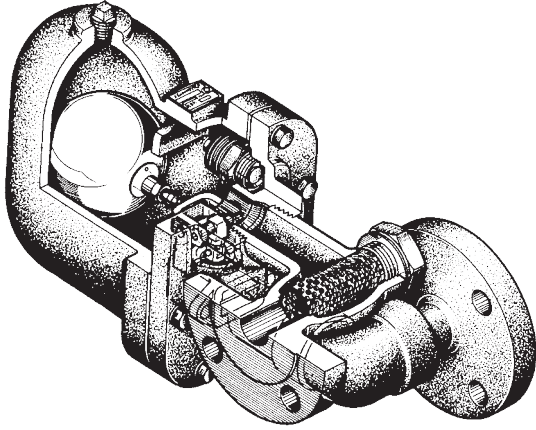




Diagrama de Capacidad

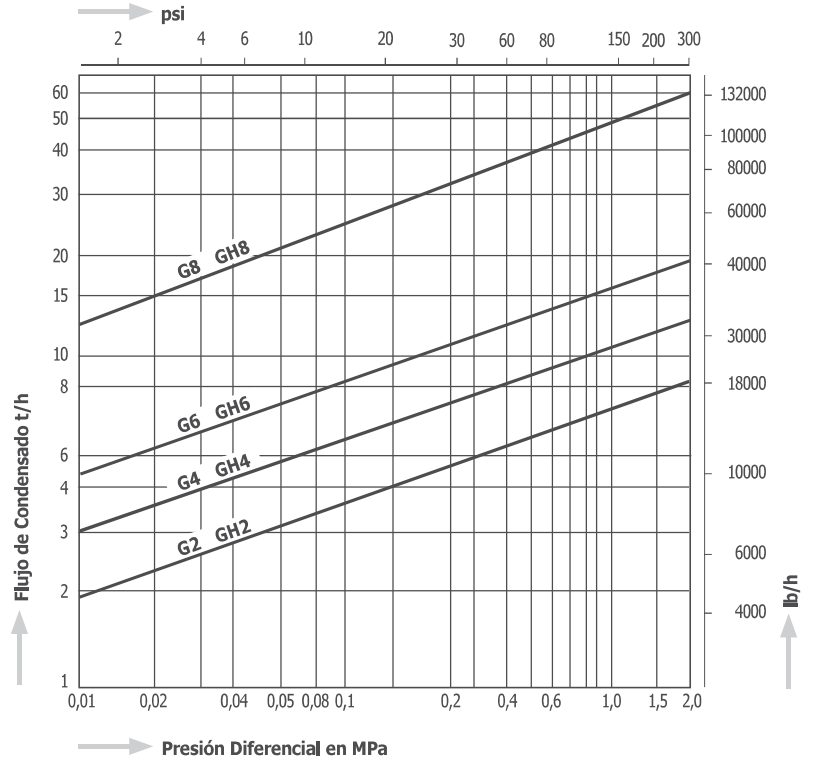

Dimensiones

G2 / GH2

G4, G6, G8 / GH4, GH6, GH8

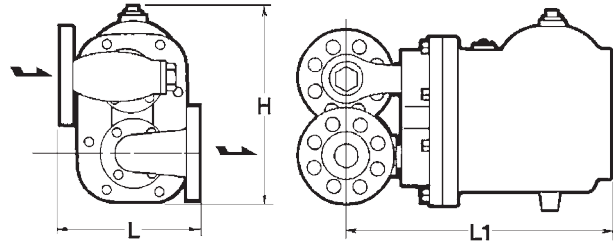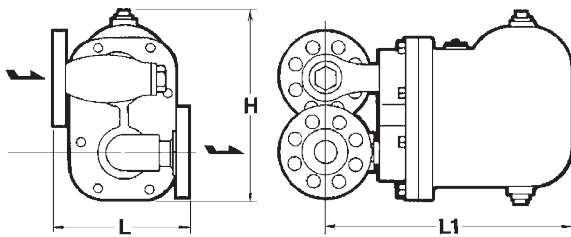

Modelo	Tipo de Conexión	Tamaño	Rango de presión de operación		Máx. temperatura de operación		Dimensiones (mm)			Dimensiones (in)			Material del Cuerpo		Peso		
			MPa	psig	°C	°F	L	L1	H	L	L1	H	kg	lb			
G2	Bridada JIS, ASME, DIN	1"	0,01 – 1,6	1.5 – 230	220	428	175	310	250	6.9	12.2	9.8	Hierro Fundido de alto grado FC250	21	46.2		
		180					7.1										
		190					7.5										
		200					7.9										
G4	1 1/4" – 2"	270	380	320	10.6	14.9	12.6	38	83.6								
G6		1 1/2" – 3"	350	410	350	13.8	16.1	13.8	62	136.4							
G8			3"	570	480	13.8	22.4	19.9	147	323.4							
GH2	Bridada JIS, ASME, DIN	1" – 1 1/2"	0,01 – 2,0	1.5 – 290	400	752	200	310	235	7.9	12.2	9.1	Acero Fundido SCPH2	24	52.8		
210		8.3															
GH4		1 1/4" – 2"					200	380	320	7.9	14.9	12.6				43	94.6
GH6							1 1/2" – 3"	270	415	345	10.6	16.3				13.6	68
GH8	3", 4"	350	590	470	13.8	23.2		18.5	162	356.4							